

**ANCHOR RING TWINFIX**  
**L'ANNEAU D'ANCRAGE TWINFIX**  
**TWINFIX ANKERPUNKT**  
**PUNTO BI-ANCLAJE TWINFIX**

**Description:**

The anchor ring Twinfix is permanently installed on a building or other structure to maintain people who are at risk of falling when carrying out maintenance work. It must be attached to the structure by two bolts M12.



**Technical specification:**

Comes with an installer and user manual.

Material: Stainless steel molded AISI316

**KN** 25 KN

**KN** >50 KN



Ø 13 mm

0,43 Kg

**Compliant with EN 795 CLASS A1**

**MADE IN EU** 

**Test certificate n°AT5967034** 

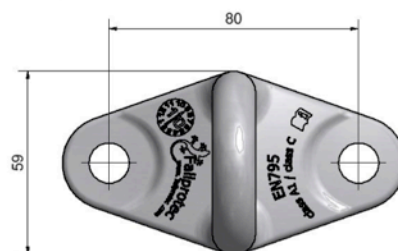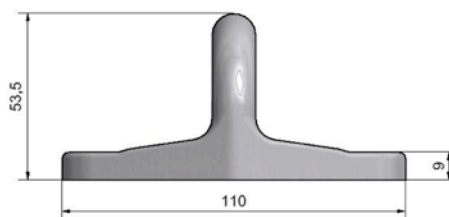

Code N°	Length	Availability
LDV 057	53,5 x 59 x 110 x 9 mm	Available from stock



For installations ensure that concrete quality must be at least 25 MPa. A single user connected to the anchor point has a working range within 2 m.