

## Monorail SafeAccess C

Monorail SafeAccess C  
Rail SafeAccess C  
SafeAccess C Schiene

Code N° MHS500 / MHS503 / MHS509 / MHS506

**FALLPROTEC**

January 2018

## Description

The SafeAccess C rail is integrated in the suspended ceiling or the underside of the ceiling. This solution is used for the maintenance and cleaning of façades inside the building.

## Advantages

- Aesthetic solution
- Suitable for rope access, RopeClimber, suspended platforms
- Custom-made system, our engineering department accompanies you for setting up the equipment
- Bendable on demand (minimum radius 800mm)
- Lightweight element (5,7kg/m) with maximum inertia
- Can be anodized or painted in RAL colours if requested
- Available in lengths of 3m and 6m



Compliant with EN1808:2015  
Machine directive 2006/42/CE  
MADE IN EU




x 2

## Technical specifications

Delivered with installer and user manual

Material: Aluminium AW6060 T66

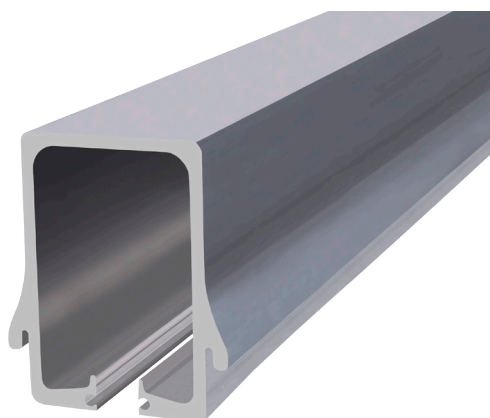

### MHS500

Rail SafeAccess C

---

## Monorail SafeAccess C

Monorail SafeAccess C

Rail SafeAccess C

SafeAccess C Schiene

Code N° MHS500 / MHS503 / MHS509 / MHS506

---

---

**FALLPROTEC**

---

January 2018

---

## PILOT 1 Trolley

Traversing trolley with rope and pulley



---

## PILOT 4 Trolley

Trolley with manual translation for abseiling works. The trolley is equipped with a manual brake.



---

## PILOT 2 Trolley

Motorised trolley, recommended for distances over 100m.

